
双作用动力单元
DOUBLE ACTING POWER UNITS


简介 General Description


此款动力单元由高压齿轮泵，直流电机，中间块，液压阀，油箱等组成。是基本的中位卸荷，动力上升，动力下降油路，适合双作用油缸的驱动控制。

This power unit consists of gear pump, DC mot -or,central manifold, valves,tank ect.This power unit features a basic neutral open , power up and power down function,which is used to the drive and control a group of double acting cylinders.

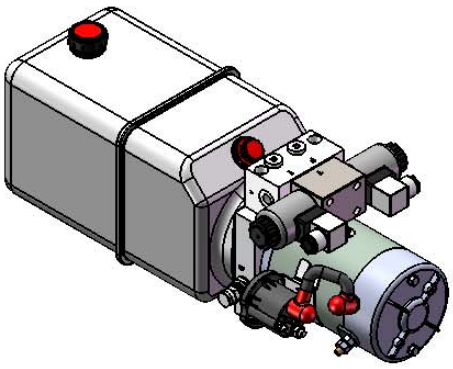


外形尺寸图 Dimensions

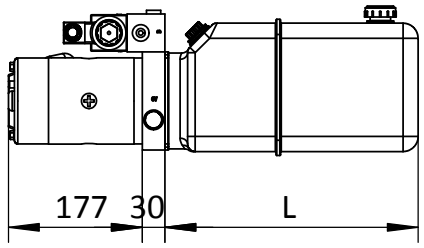

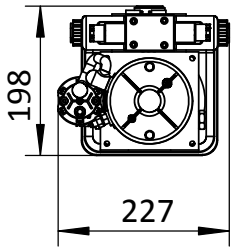

A 口 A Port	G3/8
B口 B Port	
Other port is avaliable	

液压原理图 Hydraulic Circuit



型号规格说明 Model Specifications

型号 Model	电机 Motor	名义转速 Nominal Speed	泵排量 Displacement	溢流阀压力 Relief Valve Set	油箱容量 Tank volume	电磁阀电压 Solenoid Valve Volt	油箱长度 L（mm）
DA1134-*	DC12V 1.6KW	2500RPM	1.3ml/r	180bar	4L	DC12V	200
DA1167-*			1.6ml/r		7L		290
DA2217-*	DC24V 2.0KW		2.1ml/r		7L	DC24V	290
DA22713-*			2.7ml/r		13L		550

备注：1.如需不同流量的泵，压力，电机功率等系统参数，请联系销售人员。
Note：1.Please consult our sales engineer for the different pump displacement,motor power and tank volume.