
升降平台动力单元
LIFT TABLE POWER UNITS


简介 General Description


这款动力单元专为中，小型升降平台设计，由高压齿轮泵，直流电机，中间集成块，螺纹插装阀，油箱等零部件组成。升降平台的下降由电磁卸荷阀实现，压力补偿阀控制下降速度平稳。

This power unit is designed exclusively for small and medium sized lift table,Consistsing of gear pump, DC motor,central manifold,cartridge valve, tank ect.Thelowering speedis adjusted by regulator pressure compensated flow control valvein-line.

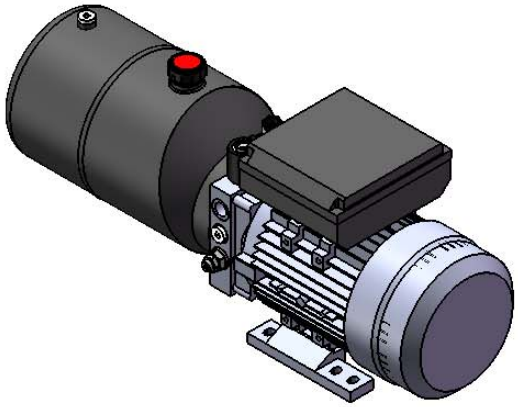


外形尺寸图 Dimensions

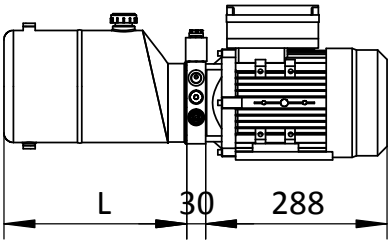



P1口 P1 Port P2口 P2 Port	G3/8
T口 TPort	G1/4
Other port is avaliable	

液压原理图 Hydraulic Circuit

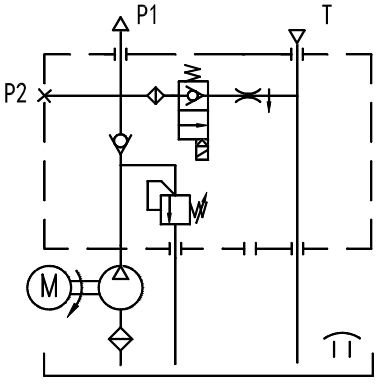

型号规格说明 Model Specifications

型号 Model	电机 Motor	额定转速 Rated speed	泵排量 Displacement	溢流阀压力 Relief Valve Set	油箱容量 Tank volume	电磁阀电压 Solenoid Valve Volt
MLT222512-*	AC220V 1.5KW	2850rpm	1.6ml/r	200bar	6L	DC12V
MLT223214-*			2.1ml/r	160bar	6L	DC24V
MLT223716-*			2.5ml/r	120bar	8L	AC220V
MLT334216-*	AC380V 2.2KW		2.1ml/r	200bar	8L	AC220V
MLT334220-*			2.5ml/r	160bar	10L	AC220V
MLT335025-*			2.7ml/r	150bar	12L	AC220V

备注：1.如需不同流量的泵，压力，电机功率等系统参数，请联系销售人员。
2.如需订购CSA 或UL认证，60HZ的动力单元，请在订购时说明。
3.如需手动应急放油装置，请在订购时说明。

Note：1.Please consult our sales engineer for the different pump displacement,motor power and tank volume.
2.60HZ motors with CSA or UL certification are available upon request.
3.The manual override function is avaliable on request.